


STC600

STC600 TRUCK CRANE
60 TONS LIFTING CAPACITY

Quality Changes the World

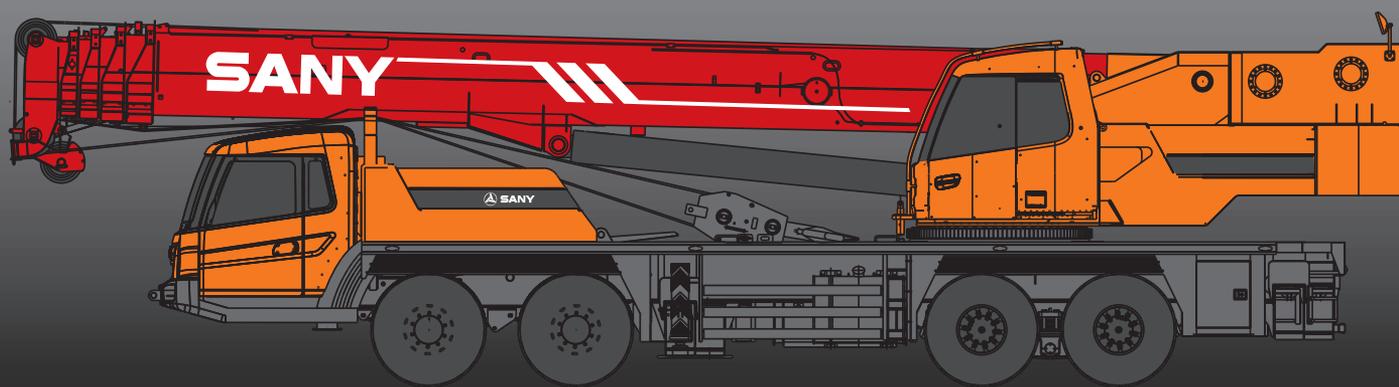

SANY

SANY Automobile Hoisting Machinery is one of the core business unit of Sany Heavy Industry, mainly engaged in the research and development of high end, mid to large tonnage crane series, including mobile crane, crawler crane, tower crane and loader crane. It has two industrial parks in Ningxiang and Huzhou, since entering the market, the products of Sany Automobile Hoisting Machinery have received worldwide recognition with advanced technology, lean manufacturing, high reliability and excellent service.



SANY TRUCK CRANE

CONTENT

- 04 Icon
- 05 Selling points
- 06 Introduction
- 09 Dimension
- 10 Technical Parameter
- 11 Operation Condition
- 12 Load Chart
- 14 Wheel Crane Family Map



Excellent and stable chassis performance / chassis system


Double-axle drive is used, providing good trafficability and comfortableness under complex road condition with reliable traveling performance.

Engine has the multimode power output function, which reduces power consumption. The use of tipping over early-warning technology provides high stability and safety of the overall operation.




Highly efficient, stable, energy-saving and adjustable hydraulic system

Hydraulic system load feedback and constant power control is applied to provide strong lifting capacity and good micro-mobility. Unique steering buffer design is adopted to ensure stable braking operation.

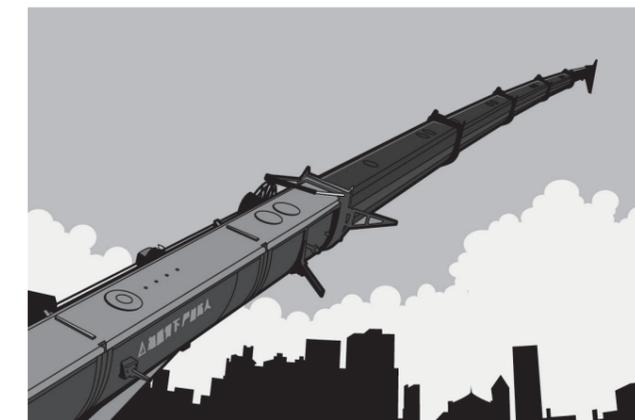

Ultra long, super strong and highly sensitive load lifting capacity

Five-section boom of high strength steel structure and optimized U-shaped section reduces weight significantly with higher safety rates. Jib mounting angles are 0°, 15° and 30°, which ensures fast and convenient change-over between different operating conditions so as to improving working efficiency of the machine.

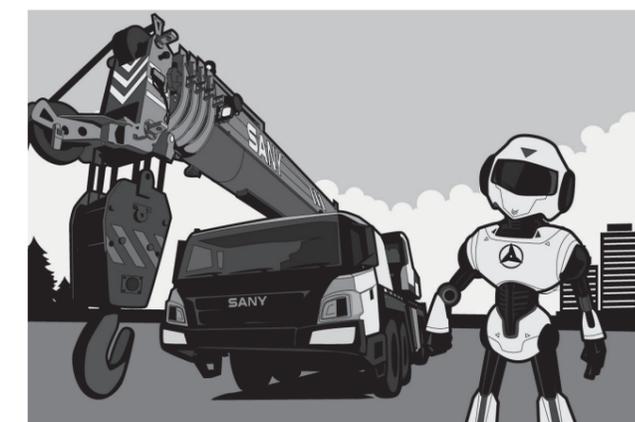

Safe, stable advanced, and intelligent electric control system

Self-developed controller SYMC specially for engineering machinery is configured. The adoption of CAN-bus full-digital network control technology ensures stable control signal, simple harness and high reliability. Timely feedback of data information can achieve the monitoring of the overall working status in real-time. The load moment limiter equipped with the comprehensive intelligent protection system is used with accuracy within 5% to provide a comprehensive logic and interlock control, thus ensuring more safe and reliable operation.

Superstructure



Cab

- It is made of safety glass and anti-corrosion steel plate with ergonomic design such as full-coverage soften interior, panoramic sunroof and adjustable seats etc., and humanized design providing more comfortable and relaxing operation experience. The display of load moment limiter integrates main console and operation display system, which clearly show the data of all operating superstructure conditions for lifting operation.



Hydraulic system

- High-quality key hydraulic components such as main oil pump, rotary pump, main valve, winch motor and balancing parts etc. are adopted to achieve stable and reliable operation of the hydraulic system. Superior operation performance is guaranteed by accurate parameter matching.
- Through the adoption of load sensitive variable displacement piston pump, pump displacement can be adjusted in real-time, achieving high-precision flow control with no energy loss during operation.
- Main valve has flow compensation and load feedback control function, enabling stable and convenient control of single action and combined action under different operation conditions.
- Winch adopts the electronically controlled variable motor to ensure high operation efficiency. Max. single line speeds of main and auxiliary winches is up to 130m/min.
- Slewing system is equipped with the integrated slewing buffer valve with free slipping function to ensure more stable starting and control of the slewing operation and excellent micro-mobility.
- Hydraulic oil tank capacity: 800L.



Control system

- CAN-bus instrument: CAN-bus instrument with a combined intelligent control electrical system is used for easy reading of the traveling parameters at any time. The engine fault warning function is applied to ensure convenient and fast troubleshooting.
- Automatic outrigger system: Electrically controlled outrigger with automatic leveling and fault diagnosis warning function is adopted, which is flexible and fast to operate.
- With fully security protection system, main and auxiliary winches are equipped with over-rollback limiter and height limiters to prevent over-rolling out and over-hoisting of steel rope, including tip-over and limit angle protection.
- Load moment limiter: The adoption of high intelligent load moment limiter system can comprehensively protect lifting operation, ensuring accurate, stable and comfort operation.
- The IO monitoring system can monitoring the input and output situation of the superstructure electricity system and can detect hydraulic system, chassis (for major safety failure), engine and gearbox for fault to ensure reliable operation of the crane.



Luffing system

- Dead-weight luffing provides more stable luffing operation at low energy loss.
- Luffing angle: -2° ~ 80° .



Telescopic system

- Five-section boom is applied, with basic boom length of 11.5m, full-extended boom length of 43m, jib length of 16m, lifting height of fully extended boom of 44.1m, Max. lifting height of 59.8m including jib. It is made of fine grain high-strength steel, with U-shaped cross section and with telescopic operation controlled independently by dual- cylinder rope.



Slewing system

- 360° rotation can be achieved with Max. slewing speed of 2.0r/min. Hydraulic controlled proportional speed adjustment is applied to provide stable and reliable operation of the system. Unique rotary buffer design ensures more stable braking.

Superstructure



Hoisting system

- The adoption of pump and motor double variable speed control ensures high efficiency and excellent energy saving functionality. With perfect combination of winch balance valve and unique anti-slip technology, heavy load can be lifted and lowered smoothly.
- Closed winch brake and winch balance valve effectively prevent imbalance of the hook.
- One main hook: 610Kg, one auxiliary hook: 95Kg. Wire rope of main winch: left-handed wire rope 18-35W \times 7-1960USZ 220m. Wire rope of auxiliary winch: left-handed wire rope 18-35W \times 7-1960USZ 130m.



Safety system

- Load moment limiter: Load moment limiter calculation system based on lifting load mechanical model is established using an analytical mechanics method with rated lifting accuracy up to $\pm 5\%$ through on-line non-load calibration, providing full protection to lifting operation. In case of overload operation, system will automatically issue an alarm to provide safety protection for manipulation.
- Hydraulic system is configured with the balance valve, overflow valve and two-way hydraulic lock etc. components, thus achieving stable and reliable operation of the hydraulic system.
- Main and auxiliary winches are equipped with over roll-out limiter to prevent over rolling-out of wire rope.
- Boom and jib ends are equipped with height limiters respectively to prevent over-hoisting of wire rope.
- Boom head is equipped with anemometer to detect whether the high-altitude wind speed is within the allowable range.
- Boom head is equipped with anemometer and press sensor to indicate the working condition of whole crane in real-time, giving an alarm and cutting off the dangerous action automatically.



Counterweight

- Counterweight is 4000kg, no flexible counterweight.

Chassis



Cab

- Cab is made of new steel structure self-developed by SANY, featuring excellent shock absorption and tightness, which is configured with swing-out doors at both sides, pneumatically suspended driver's seat and passenger's seat, adjustable steering wheel, large rearview mirror, comfortable driver's chair with a headrest, anti-fog fan, air conditioner, stereo radio and complete control instruments and meters, providing more comfortable, safe and humanized operation experience.



Carrier frame

- Designed and manufactured by SANY, anti-torsion box structure is welded by fine-grain high-strength steel plate to provide strong load bearing capacity.



Axles

- Axles 3 and 4 are drive axles and axles 1 and 2 are steering axles, axle and wheel differentials are installed in axle 3 and wheel differential is installed in axle 4. The use of welding process for axle housing provides stronger load bearing capacity.





Engine

- Type: Inline six-cylinder, water cooled, supercharged and inter-cooling diesel engine
- Rated power: 250kw/2100r/min
- Environment-protection: Emission complies with EuroIII standard
- Capacity of fuel tank: 300L

Chassis

- Transmission system**
- Gearbox: Manual gearbox with 9-gear is adopted, 9 forward gears and 1 reverse gear which is easy to operate, with large speed ratio range applied, which meets the requirements of low gradeability speed and high traveling speed.
 - Transmission shaft: With optimized arrangement of the transmission shaft, the transmission is stable and reliable. For most optimized transmission, face-tooth coupling transmission shaft is used with large transmission torque.
- Brakes system**
- Brakes system includes traveling brake, parking brake, emergency brake and auxiliary brake.
 - Traveling brake: All wheels use the air servo brakes and dual-circuit brake system and are equipped with drum brakes.
 - Parking brake: Force driven by accumulator is applied on the third and fourth axle.
 - For emergency brake, accumulator is used not only for cutting-off brake but also for emergency brake.
 - Auxiliary brake is exhaust brake, which ensures safe and reliable traveling.
- Suspension system**
- All axles adopt the plate spring suspension systems with plate spring passed 100,000 fatigue tests and with optimization of performance parameters of the front and rear plate springs applied to ensure strength and also to provide comfort riding.
- Steering system**
- Hydraulic power mechanical steering systems are applied for axles 1 and 2 with unloading valve installed in the steering gear.
- Drive/Steer**
- 8 x 4
- Outriggers**
- Four-point supporting of the H-shaped outriggers ensures easy operation and strong stability with Max. span up to 6m x 7.6m. They are made of fine-grain high-strength steel sheet with full hydraulic transverse telescopic outriggers adopted for first and second outriggers and with horizontal adjustment applied for outriggers through a vertical cylinder.
- Tyres**
- 12" — 16.00R25
- Electrical system**
- With 2*12V maintenance-free batteries, the crane power can be cut off manually via a mechanical master power switch. The use of CAN-bus control system can achieve information interaction between superstructure and undercarriage.

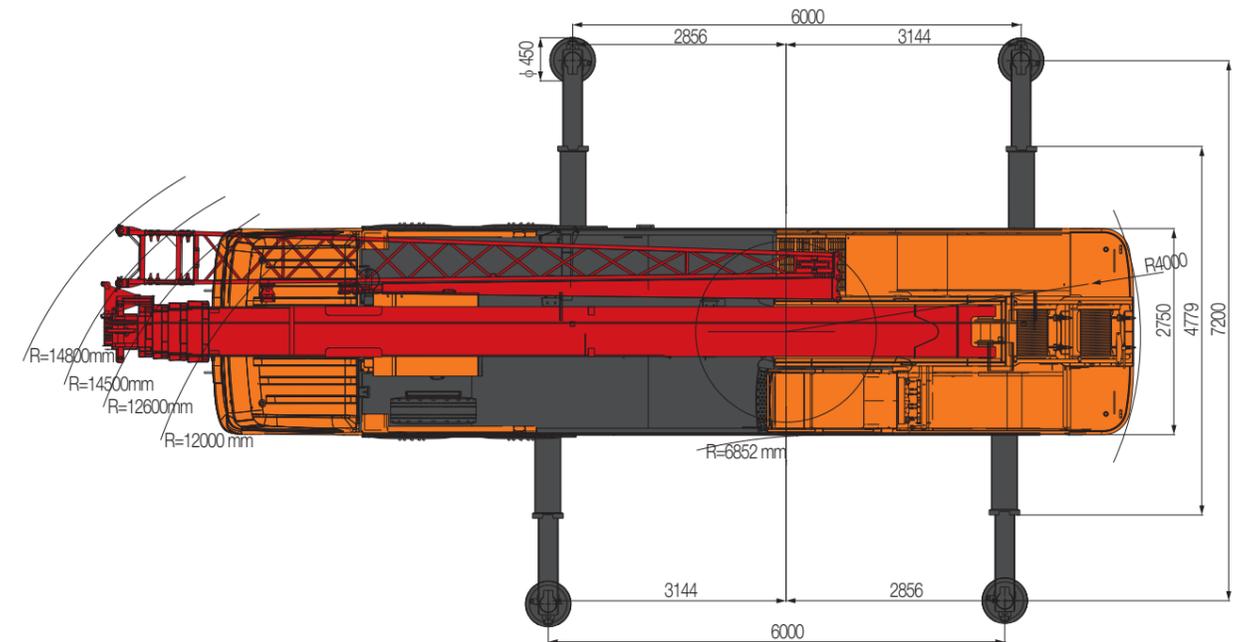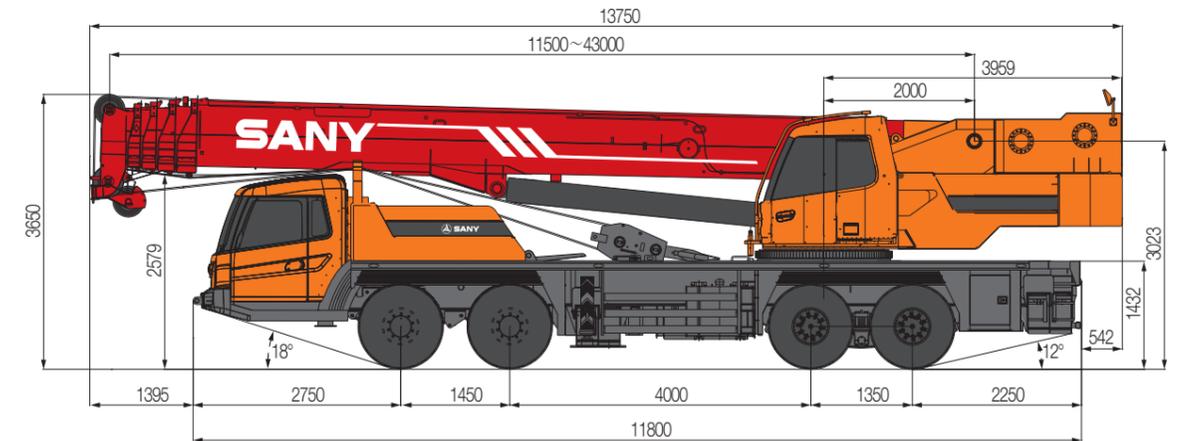

Unit:Kg

Prerequisites:
 ① Boom operating conditions(fully extended boom length),min.length is 11.5m and max.length is 43m
 ② The span of outriggers is 7.6m×7.6m
 ③ 360°rotation is applied
 ④ Counterweight is 4T

Working range(m)	Main boom											Working range(m)
	11.5	15.44	19.38	19.38	27.25	27.25	35.13	35.13	39.06	39.06	43	
3	60000											3
3.5	54000											3.5
4	48000	40000	32000	21500								4
4.5	44000	37000	31000	21500	22000	15000						4.5
5	41000	34000	29000	20000	22000	15000						5
5.5	38900	31000	27500	19000	21500	14500						5.5
6	33500	30000	25700	18100	21000	13700	14000	9000				6
6.5	28500	28000	23900	17500	19500	12800	14000	9000				6.5
7	25500	25000	21500	17000	18000	12100	14000	9000	11500	9000		7
7.5	23000	21500	18900	16200	16800	11500	13500	8500	11500	9000		7.5
8	20000	19300	17700	15600	15800	11000	13000	8500	11000	9000	9000	8
9	15700	15000	14000	13800	14500	10000	12100	7800	10500	8500	8500	9
10		12000	11000	12400	13000	9000	11500	7100	10000	8000	8500	10
11		10000	9000	11000	9900	8200	10200	6400	9000	7500	8000	11
12		8000	8000	9100	9500	7500	9000	5800	8000	7000	7500	12
14			5500	6800	7000	6300	7000	5000	6300	5900	6500	14
16			3800	4800	5200	5400	5800	4400	5000	4000	5500	16
18					4000	4500	4500	3200	3200	3500	4600	18
20					3000	3300	3500	2700	2400	2800	3500	20
22					2200	2500	2500	2400	1800	2100	3000	22
24					1500	2000	2000	1900	1300	1650	2200	24
26							1500	1500	900	1300	1800	26
28							1100	1000	600	900	1400	28
30							800	1100	700	1000	1000	30
32								900		700	700	32
34										500		34
Number of lines	12	10	8	8	6	6	4	4	4	4	3	Number of lines
Telescoping condition(%)												
Modes	I,II	I	I	II	I	II	I	II	I	II	I,II	Modes
2nd boom	0	50	100	0	100	0	100	0	100	50	100	2nd boom
3rd boom	0	0	0	33	33	66	66	100	83.3	100	100	3rd boom
4th boom	0	0	0	33	33	66	66	100	83.3	100	100	4th boom
Top boom	0	0	0	33	33	66	66	100	83.3	100	100	Top boom

- Values listed in the table refer to rated lifting capacity measured at flat and solid ground under the lever state of the crane.
- Value above heavy line shall be determined by strength of the crane and under this line shall be determined by stability of the crane.
- Rated load values determined by stability shall comply with ISO 4305.
- Rated lifting capacity listed in the table included weights of lifting hooks (610kg of main hook and 88kg of auxiliary hook)and hangers.
- Rated lifting capacity with pulley at boom tip shall not exceed 4000kg and then subtracts(2300kg)to gain rated lifting capacity if the boom is used to lift after the installation of jib.
- If actual boom length and range are between two values specified in the table, larger value will determine the lifting capacity.

Unit:Kg

Prerequisites:
 ① Boom operating conditions(fully extended boom length +jib length),max.length is 43m+16m
 ② The span of outriggers is 7.6m×7.6m
 ③ 360°rotation is applied
 ④ Counterweight is 4T

Main boom angle	Main boom+Jib		
	0°	15°	30°
78°	2400	1450	1000
77°	2400	1400	1000
75°	2300	1300	950
73°	2000	1200	850
71°	1800	1100	850
68°	1500	1000	800
66°	1300	950	760
63°	1100	850	720
61°	950	750	650
58°	650	600	550
56°	500		
Min.elevation angle	55°		

Unit:Kg

Prerequisites:
 ① Boom operating conditions(fully extended boom length +jib length),max.length is 43m+9.2m
 ② The span of outriggers is 7.6m×7.6m
 ③ 360°rotation is applied
 ④ Counterweight is 4T

Main boom angle	Main boom+Jib		
	0°	15°	30°
78°	3500	2400	2000
77°	3200	2300	1900
75°	3000	2200	1800
73°	2700	2000	1700
71°	2500	1800	1600
68°	2200	1700	1400
66°	2000	1500	1300
63°	1800	1400	1100
61°	1500	1200	950
58°	1100	950	750
56°	700	650	550
Min.elevation angle	55°		

STC600 TRUCK CRANE
WHEEL CRANE FAMILY MAP

TRUCK CRANE



STC200
Maximum Load Capacity: 20t
Telescopic Boom: 4 Sections, 10.6-33m



STC250
Maximum Load Capacity: 25t
Telescopic Boom: 4 Sections, 10.65-33.5m



STC250H
Maximum Load Capacity: 25t
Telescopic Boom: 5 Sections, 10.5-39.5m



STC300TH
Maximum Load Capacity: 30t
Telescopic Boom: 4 Sections, 10.6-33.5m



STC300H
Maximum Load Capacity: 30t
Telescopic Boom: 5 Sections, 10.5-39.5m



STC500
Maximum Load Capacity: 50t
Telescopic Boom: 5 Sections, 11.5-43m



STC550
Maximum Load Capacity: 55t
Telescopic Boom: 5 Sections, 11.5-43m



STC550EYR
Maximum Load Capacity: 55t
Telescopic Boom: 5 Sections, 11.5-43m



STC600
Maximum Load Capacity: 60t
Telescopic Boom: 5 Sections, 11.5-43m



STC750
Maximum Load Capacity: 75t
Telescopic Boom: 5 Sections, 11.8-45m



STC800
Maximum Load Capacity: 80t
Telescopic Boom: 5 Sections, 11.8-45m



STC800EYR
Maximum Load Capacity: 80t
Telescopic Boom: 5 Sections, 11.8-45m



STC1000
Maximum Load Capacity: 100t
Telescopic Boom: 5 Sections, 13.5-52m



STC1000C
Maximum Load Capacity: 100t
Telescopic Boom: 6 Sections, 13.25-60m



STC1300C
Maximum Load Capacity: 130t
Telescopic Boom: 6 Sections, 13.3-60m

ALL TERRAIN CRANE



SAC1800
Maximum Load Capacity: 180t
Telescopic Boom: 6 Sections, 13.5-62m



SAC2200
Maximum Load Capacity: 220t
Telescopic Boom: 6 Sections, 13.5-62m



SAC3000
Maximum Load Capacity: 300t
Telescopic Boom: 7 Sections, 15.4-80m



SAC3500
Maximum Load Capacity: 350t
Telescopic Boom: 6 Sections, 15.2-70m



SAC6000
Maximum Load Capacity: 600t
Telescopic Boom: 7 Sections, 17.1-90m

ROUGH-TERRAIN CRANE



SRC350
Maximum Load Capacity: 35t
Telescopic Boom: 4 Sections, 10-31.5m



SRC550
Maximum Load Capacity: 55t
Telescopic Boom: 4 Sections, 11.25-34.5m



SRC550H
Maximum Load Capacity: 55t
Telescopic Boom: 5 Sections, 11.5-42.5m



SRC750
Maximum Load Capacity: 75t
Telescopic Boom: 5 Sections, 11.8-45m



Quality Changes the World

SANY AUTOMOBILE HOISTING MACHINERY

Address: SANY Industrial Park, Jinzhou Development Zone,
Changsha, Hunan, China.
Service Hotline: 4006098318
Email: crd@sany.com.cn
For more information, please visit: www.sanygroup.com

For our consistent improvement in technology, specifications may change without notice.
The machines illustrated may show optional equipment which can be supplied at additional cost.

Distributed By:

--